Technical Specificaions

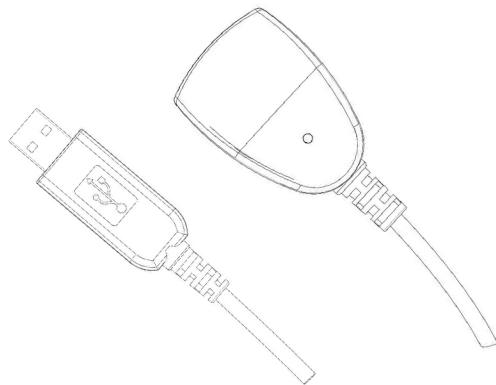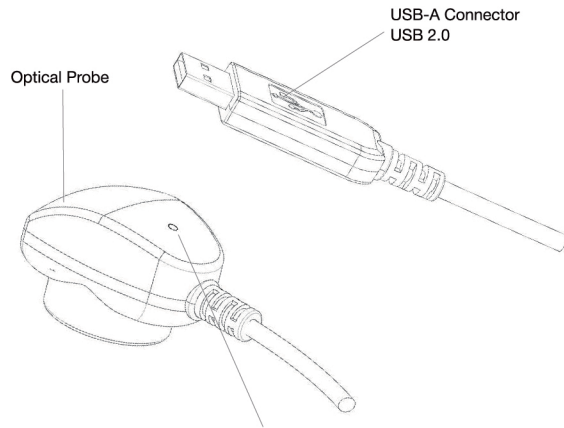|	
Standard:	ANSI C12.18 compliant
Interface:	Infrared optical
Connector:	USB 2.0
Maximum B.R.:	Up to 38,400bps
Attachment:	Strong magnetic, ANSI C12.18 compliant
Computer compatibility:	Microsoft Windows, Mac OS X, Linux, Android, Windows CE
Cable:	2 meters (6.5 feet)
Enviroment:	-15°C ~ 80°C (5°F ~ 176°F)

TESPRO CORP.
https://tespro.ca

TP-USB

Optical Probe
for Meter Communication

TESPRO CORP.
https://tespro.ca

USB-A Connector
USB 2.0

Optical Probe

LED Indicators
Green: Receiving
Red: Transmitting

Some of the models does not
come with LED indicator.

Installation of the Probe

The driver of TP-USB is built-in in the latest OS. In most of the cases, you will not have to install the driver, the probe will be automatically recognized by your computer or handheld device.

You may need to install driver if you are using earlier version of OS. In that case, you can download the driver from the following web addresses.

Download Driver

Scan QR code or enter following URL to download the driver.

https://tespro.ca/download

Supported OS:
- Windows
- Mac OS X
- Linux
- Android
- Windows CE

Scan to Download